



- .. CSA compliant
- .. Up to 150' Self-Support Tower
- .. Standard 10' sections
- .. Flat flanges provides an easy connection between sections (3 bolts per leg)
- .. All-Weld sections minimize assembly and installation time
- .. Applications:
 - ... 2-way applications
 - ... Wireless broadband
 - ... SCADA



The SuperTitan Weld is designed to meet market loading requirements and conforms to ANSI-TIA 222-G Standard. Trylon understands the importance of minimizing freight costs and as a result the tower is designed to ship nested.

The all-weld design uses flat pads allows for easy connections, which further minimizes assembly and installation time. The tower ships with integral climbing face and transmission line supports which offer additional value and eliminate the need to purchase separately. P.E. stamped drawings are available.

SUPERTITAN WELD SPECIFICATIONS

- All-Weld sections minimize assembly and installation time
- Flat flanges provides an easy connection between sections (3 bolts per leg)
- Designed to conform with ANSI-TIA-222 F&G Standard
- Climbing horizontals on one face (7/8" or 3/4")
- Every 5th section nests for reduced freight costs
- Maximum height: 150ft
- Section height: 10ft

SUPERTITAN WELD APPLICATIONS

- Oil and gas sites
- Railways: minimizes access time required
- Tower Contractors: minimizes assembly
- Ideal loading capacity for SCADA, WISP, Broadband and 2-Way applications

THE SUPERTITAN WELD DIFFERENCE

- Only All-Weld Self-Support available through distribution
- 3 hole bolts pattern and flat flanges
- Towers ship nested to minimizes freight costs



The flat pads make installation easy










Tower ships nested to minimize freight



Integral transmission line supports


20' Towers



Model Designation:		W080	W100	W200	W300	W400	W500	W600
Part Number:		5.640.0080.020	5.640.0100.020	5.640.0200.020	5.640.0300.020	5.640.0400.020	5.640.0500.020	5.640.0600.020
		 Sec #1 Sec #1	 Sec #1 Sec #2	 Sec #2 Sec #3	 Sec #3 Sec #4	 Sec #4 Sec #5	 Sec #5 Sec #6	 Sec #6 Sec #7
Allowable antenna area in ft² at:	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	90/68/54	194/148/120	220/168/136	228/176/144	224/172/136	216/166/132
Suggested List Price		\$3,767.76	\$3,793.20	\$4,066.81	\$4,243.73	\$4,440.07	\$4,739.78	\$4,839.42
Shipping Weight (lbs)		550	880	1071	1244	1388	1579	1631





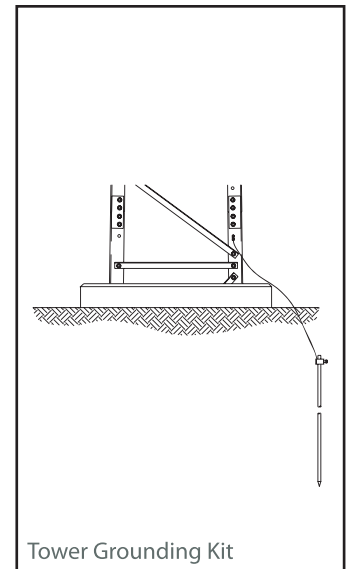


*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
*Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories




Accessory:	W080	W100	W200	W300	W400	W500	W600
Cable Safety Climb Kits <i>no slider</i>	4.99.0220.000 \$324.00	4.99.0220.000 \$324.00	4.99.0220.000 \$324.00	4.99.0220.000 \$324.00	4.99.0220.000 \$324.00	4.99.0220.000 \$324.00	4.99.0220.000 \$324.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	n/a n/a	4.936.0026.002 \$877.00	4.936.0026.003 \$940.00	4.936.0026.004 \$990.00	4.936.0026.005 \$1,050.00	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.100 \$1,275.00	4.912.1177.100 \$1,275.00	4.912.1177.125 \$1,295.00	4.912.1177.150 \$1,310.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W060	W080	W100	W200	W300	W400	W500
Part Number:		5.640.0060.030	5.640.0080.030	5.640.0100.030	5.640.0200.030	5.640.0300.030	5.640.0400.030	5.640.0500.030
		 Sec #1 Sec #1 Sec #1	 Sec #1 Sec #1 Sec #2	 Sec #1 Sec #2 Sec #3	 Sec #2 Sec #3 Sec #4	 Sec #3 Sec #4 Sec #5	 Sec #4 Sec #5 Sec #6	 Sec #5 Sec #6 Sec #7
Allowable antenna area in ft ² at:	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	82/62/50	124/92/74	202/154/124	210/162/130	206/158/124
Suggested List Price		\$4,887.26	\$4,912.70	\$5,186.31	\$5,381.53	\$5,683.74	\$6,047.36	\$6,272.29
Shipping Weight (lbs)		700	1,093	1,291	1,455	1,704	1,961	2,089

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

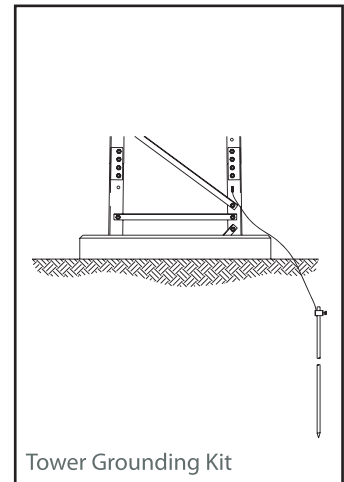








Accessory:	W060	W080	W100	W200	W300	W400	W500
Cable Safety Climb Kits <i>no slider</i>	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	n/a n/a	4.936.0026.002 \$877.00	4.936.0026.003 \$940.00	4.936.0026.004 \$990.00	4.936.0026.005 \$1,050.00	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.100 \$1,275.00	4.912.1177.100 \$1,275.00	4.912.1177.125 \$1,295.00	4.912.1177.150 \$1,310.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.


40' Towers



Model Designation:		W040	W060	W080	W100	W200	W300	W400
Part Number:		5.640.0040.040	5.640.0060.040	5.640.0080.040	5.640.0100.040	5.640.0200.040	5.640.0300.040	5.640.0400.040
		 Sec #1 Sec #1 Sec #1 Sec #1	 Sec #1 Sec #1 Sec #1 Sec #2	 Sec #1 Sec #1 Sec #2 Sec #3	 Sec #1 Sec #2 Sec #3 Sec #4	 Sec #2 Sec #3 Sec #4 Sec #5	 Sec #3 Sec #4 Sec #5 Sec #6	 Sec #4 Sec #5 Sec #6 Sec #7
Allowable antenna area in ft² at:*	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	--/--	76/56/46	116/86/68	168/126/98	184/138/110
Suggested List Price		\$6,006.76	\$6,032.20	\$6,305.81	\$6,501.03	\$6,821.54	\$7,291.03	\$7,579.87
Shipping Weight (lbs)		1,020	1,245	1,510	1,675	1,915	2,278	2,471





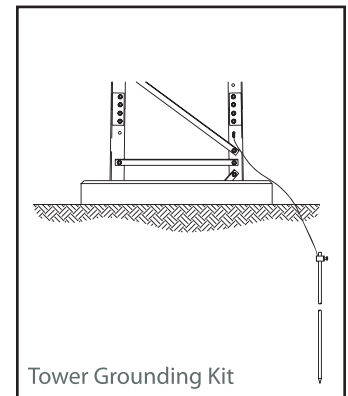


*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
*Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories





Accessory:	W040	W060	W080	W100	W200	W300	W400
Cable Safety Climb Kits <i>no slider</i>	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	n/a n/a	4.936.0026.002 \$877.00	4.936.0026.003 \$940.00	4.936.0026.004 \$990.00	4.936.0026.005 \$1,050.00	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.100 \$1,275.00	4.912.1177.100 \$1,275.00	4.912.1177.125 \$1,295.00	4.912.1177.150 \$1,310.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W020	W040	W060	W080	W100	W200	W300
Part Number:		5.640.0020.050	5.640.0040.050	5.640.0060.050	5.640.0080.050	5.640.0100.050	5.640.0200.050	5.640.0300.050
		 Sec #1 Sec #1 Sec #1 Sec #1 Sec #1	 Sec #1 Sec #1 Sec #1 Sec #1 Sec #2	 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3	 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4	 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5	 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6	 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7
Allowable antenna area in ft² at:	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--/--	--/--/--	--/--/--	--/--/--	74/52/44	110/82/64	130/94/72
Suggested List Price		\$7,126.26	\$7,151.70	\$7,425.31	\$7,620.53	\$7,941.04	\$8,428.83	\$8,823.54
Shipping Weight (lbs)		1,215	1,385	1,620	1,894	2,135	2,489	2,788

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories










Accessory:	W020	W040	W060	W080	W100	W200	W300
Cable Safety Climb Kits <i>no slider</i>	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	n/a n/a	4.936.0026.002 \$877.00	4.936.0026.003 \$940.00	4.936.0026.004 \$990.00	4.936.0026.005 \$1,050.00	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.100 \$1,275.00	4.912.1177.100 \$1,275.00	4.912.1177.125 \$1,295.00	4.912.1177.150 \$1,310.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.


50' Towers continued



Model Designation:		W400	W500	W600	W700	W800	W900	W1000
Part Number:		5.640.0400.050	5.640.0500.050	5.640.0600.050	5.640.0700.050	5.640.0800.050	5.640.0900.050	5.640.1000.050
		 <div>Sec #4</div> <div>Sec #5</div> <div>Sec #6</div> <div>Sec #7</div> <div>Sec #8</div>	 <div>Sec #5</div> <div>Sec #6</div> <div>Sec #7</div> <div>Sec #8</div> <div>Sec #9</div>	 <div>Sec #6</div> <div>Sec #7</div> <div>Sec #8</div> <div>Sec #9</div> <div>Sec #10</div>	 <div>Sec #7</div> <div>Sec #8</div> <div>Sec #9</div> <div>Sec #10</div> <div>Sec #11</div>	 <div>Sec #8</div> <div>Sec #9</div> <div>Sec #10</div> <div>Sec #11</div> <div>Sec #12</div>	 <div>Sec #9</div> <div>Sec #10</div> <div>Sec #11</div> <div>Sec #12</div> <div>Sec #13</div>	 <div>Sec #10</div> <div>Sec #11</div> <div>Sec #12</div> <div>Sec #13</div> <div>Sec #14</div>
Allowable antenna area in ft ² at:*	CSA-S37-01 350/450/550 Pa Wind 25mm ice	174/132/104	186/140/110	178/136/108	266/190/142	252/184/140	244/180/140	238/178/140
Suggested List Price		\$9,263.39	\$9,759.26	\$10,093.51	\$10,583.68	\$11,149.43	\$11,790.19	\$12,463.31
Shipping Weight (lbs)		3,069	3,345	3,602	3,944	4,303	4,689	5,083

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "-" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories






Accessory:	W400	W500	W600	W700	W800	W900	W1000
Cable Safety Climb Kits <i>no slider</i>	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00	4.99.0250.000 \$378.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	4.936.0026.008 \$1,233.00	4.936.0026.009 \$1,287.00	4.936.0026.010 \$1,347.00	4.936.0026.011 \$1,397.00	4.936.0026.012 \$1,460.00	4.936.0026.013 \$1,520.00	4.936.0026.014 \$1,580.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W020	W040	W060	W080	W100	W200	W300
Part Number:		5.640.0020.060	5.640.0040.060	5.640.0060.060	5.640.0080.060	5.640.0100.060	5.640.0200.060	5.640.0300.060
		<div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #2</div></div>	<div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #2</div></div> <div><div></div><div>Sec #3</div></div>	<div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #2</div></div> <div><div></div><div>Sec #3</div></div> <div><div></div><div>Sec #4</div></div>	<div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #2</div></div> <div><div></div><div>Sec #3</div></div> <div><div></div><div>Sec #4</div></div> <div><div></div><div>Sec #5</div></div>	<div><div></div><div>Sec #1</div></div> <div><div></div><div>Sec #2</div></div> <div><div></div><div>Sec #3</div></div> <div><div></div><div>Sec #4</div></div> <div><div></div><div>Sec #5</div></div> <div><div></div><div>Sec #6</div></div>	<div><div></div><div>Sec #2</div></div> <div><div></div><div>Sec #3</div></div> <div><div></div><div>Sec #4</div></div> <div><div></div><div>Sec #5</div></div> <div><div></div><div>Sec #6</div></div> <div><div></div><div>Sec #7</div></div>	<div><div></div><div>Sec #3</div></div> <div><div></div><div>Sec #4</div></div> <div><div></div><div>Sec #5</div></div> <div><div></div><div>Sec #6</div></div> <div><div></div><div>Sec #7</div></div> <div><div></div><div>Sec #8</div></div>
Allowable antenna area in ft² at:*	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	--/--	--/--	70/52/40	94/66/52	124/90/68
Suggested List Price		\$8,271.20	\$8,544.81	\$8,740.03	\$9,060.54	\$9,548.33	\$9,961.34	\$10,507.06
Shipping Weight (lbs)		1,600	1,785	2,025	2,354	2,708	2,999	3,386

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories










Accessory:	W020	W040	W060	W080	W100	W200	W300
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	4.936.0026.002 \$877.00	4.936.0026.003 \$940.00	4.936.0026.004 \$990.00	4.936.0026.005 \$1,050.00	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00	4.936.0026.008 \$1,233.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.100 \$1,275.00	4.912.1177.125 \$1,295.00	4.912.1177.150 \$1,310.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.225 \$1,330.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.




60' Towers continued



Model Designation:		W400	W500	W600	W700	W800	W900	W1000
Part Number:		5.640.0400.060	5.640.0500.060	5.640.0600.060	5.640.0700.060	5.640.0800.060	5.640.0900.060	5.640.1000.060
		 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9	 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10	 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11	 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12	 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13	 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14	 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15
Allowable antenna area in ft ² at:	CSA-S37-01 350/450/550 Pa Wind 25mm ice	168/126/98	178/134/104	170/130/104	252/180/134	240/174/132	232/172/132	228/170/134
Suggested List Price		\$11,066.84	\$11,526.38	\$12,045.26	\$12,674.80	\$13,466.57	\$14,172.33	\$14,887.12
Shipping Weight (lbs)		3,727	4,061	4,416	4,812	5,285	5,723	6,100








*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "-" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories






Accessory:	W400	W500	W600	W700	W800	W900	W1000
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	4.936.0026.009 \$1,287.00	4.936.0026.010 \$1,347.00	4.936.0026.011 \$1,397.00	4.936.0026.012 \$1,460.00	4.936.0026.013 \$1,520.00	4.936.0026.014 \$1,580.00	4.936.0026.015 \$1,643.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W020	W040	W060	W080	W100	W200	W300
Part Number:		5.640.0020.060	5.640.0040.060	5.640.0060.060	5.640.0080.060	5.640.0100.060	5.640.0200.060	5.640.0300.060
								
		Sec #1	Sec #1	Sec #1	Sec #1	Sec #1	Sec #2	Sec #3
		Sec #1	Sec #1	Sec #1	Sec #1	Sec #2	Sec #3	Sec #4
		Sec #1	Sec #1	Sec #1	Sec #2	Sec #3	Sec #4	Sec #5
		Sec #1	Sec #1	Sec #2	Sec #3	Sec #4	Sec #5	Sec #6
		Sec #1	Sec #2	Sec #3	Sec #4	Sec #5	Sec #6	Sec #7
		Sec #2	Sec #3	Sec #4	Sec #5	Sec #6	Sec #7	Sec #8
		Sec #3	Sec #4	Sec #5	Sec #6	Sec #7	Sec #8	Sec #9
Allowable antenna area in ft² at:*	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	--/--	--/--	66/48/38	90/64/48	118/86/66
Suggested List Price		\$9,664.31	\$9,859.53	\$10,180.04	\$10,667.83	\$11,080.84	\$11,644.86	\$12,310.51
Shipping Weight (lbs)		1,985	2,235	2,585	2,927	3,218	3,597	4,044







*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories






Accessory:	W020	W040	W060	W080	W100	W200	W300
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	4.936.0026.003 \$940.00	4.936.0026.004 \$990.00	4.936.0026.005 \$1,050.00	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00	4.936.0026.008 \$1,233.00	4.936.0026.009 \$1,287.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.125 \$1,295.00	4.912.1177.150 \$1,310.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W400	W500	W600	W700	W800	W900	
Part Number:		5.640.0400.060	5.640.0500.060	5.640.0600.060	5.640.0700.060	5.640.0800.060	5.640.0900.060	
		 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10	 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11	 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12	 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13	 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14	 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15	
Allowable antenna area in ft ² at:	CSA-S37-01 350/450/550 Pa Wind 25mm ice	148/108/80	172/128/100	166/126/100	242/172/126	230/166/126	224/164/126	
Suggested List Price		\$12,833.96	\$13,478.13	\$14,136.38	\$14,991.94	\$15,848.71	\$16,596.14	
Shipping Weight (lbs)		4,443	4,874	5,283	5,793	6,320	6,740	








*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "—" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories



Accessory:	W400	W500	W600	W700	W800	W900	
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	
Anti-Climb Shield Kits	4.936.0026.010 \$1,347.00	4.936.0026.011 \$1,397.00	4.936.0026.012 \$1,460.00	4.936.0026.013 \$1,520.00	4.936.0026.014 \$1,580.00	4.936.0026.015 \$1,643.00	
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.225 \$1,330.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.






Model Designation:		W020	W040	W060	W080	W100	W200	W300
Part Number:		5.640.0020.080	5.640.0040.080	5.640.0060.080	5.640.0080.080	5.640.0100.080	5.640.0200.080	5.640.0300.080
		 Sec #1 Sec #1 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4	 Sec #1 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5	 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6	 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7	 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8	 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9	 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10
Allowable antenna area in ft² at:	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	--/--	--/--	64/46/36	86/60/46	114/80/58
Suggested List Price		\$10,979.03	\$11,299.54	\$11,787.33	\$12,200.34	\$12,764.36	\$13,448.31	\$14,077.63
Shipping Weight (lbs)		2,520	2,795	3,155	3,438	3,816	4,255	4,760

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-peg, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory:	W020	W040	W060	W080	W100	W200	W300
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	4.936.0026.004 \$990.00	4.936.0026.005 \$1,050.00	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00	4.936.0026.008 \$1,233.00	4.936.0026.009 \$1,287.00	4.936.0026.010 \$1,347.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.150 \$1,310.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.
































































Model Designation:		W400	W500	W600	W700	W800		
Part Number:		5.640.0400.080	5.640.0500.080	5.640.0600.080	5.640.0700.080	5.640.0800.080		
		 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11	 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12	 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13	 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14	 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15		
Allowable antenna area in ft ² at:	CSA-S37-01 350/450/550 Pa Wind 25mm ice	144/102/76	166/124/96	160/122/98	232/164/120	222/160/120		
Suggested List Price		\$14,785.71	\$15,569.25	\$16,453.52	\$17,374.08	\$18,272.52		
Shipping Weight (lbs)		5,257	5,742	6,265	6,828	7,336		

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory:	W400	W500	W600	W700	W800		
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00		
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00		
Anti-Climb Shield Kits	4.936.0026.011 \$1,397.00	4.936.0026.012 \$1,460.00	4.936.0026.013 \$1,520.00	4.936.0026.014 \$1,580.00	4.936.0026.015 \$1,643.00		
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00		

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.





Model Designation:		W020	W040	W060	W080	W100	W200	W300
Part Number:		5.640.0020.090	5.640.0040.090	5.640.0060.090	5.640.0080.090	5.640.0100.090	5.640.0200.090	5.640.0300.090
		 Sec #1	 Sec #1	 Sec #1	 Sec #1	 Sec #1	 Sec #2	 Sec #3
		 Sec #1	 Sec #1	 Sec #1	 Sec #1	 Sec #2	 Sec #3	 Sec #4
		 Sec #1	 Sec #1	 Sec #1	 Sec #2	 Sec #3	 Sec #4	 Sec #5
		 Sec #1	 Sec #1	 Sec #2	 Sec #3	 Sec #4	 Sec #5	 Sec #6
		 Sec #1	 Sec #2	 Sec #3	 Sec #4	 Sec #5	 Sec #6	 Sec #7
		 Sec #2	 Sec #3	 Sec #4	 Sec #5	 Sec #6	 Sec #7	 Sec #8
		 Sec #3	 Sec #4	 Sec #5	 Sec #6	 Sec #7	 Sec #8	 Sec #9
		 Sec #4	 Sec #5	 Sec #6	 Sec #7	 Sec #8	 Sec #9	 Sec #10
		 Sec #5	 Sec #6	 Sec #7	 Sec #8	 Sec #9	 Sec #10	 Sec #11
Allowable antenna area in ft²*	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	--/--	--/--	62/46/34	84/58/46	112/78/56
Suggested List Price		\$12,419.04	\$12,906.83	\$13,319.84	\$13,883.86	\$14,567.81	\$15,215.43	\$16,029.38
Shipping Weight (lbs)		3,202	3,485	3,710	4,036	4,474	4,971	5,573

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory:	W020	W040	W060	W080	W100	W200	W300
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	4.936.0026.005 \$1,050.00	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00	4.936.0026.008 \$1,233.00	4.936.0026.009 \$1,287.00	4.936.0026.010 \$1,347.00	4.936.0026.011 \$1,397.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00	4.912.1177.250 \$1,525.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.








Model Designation:		W400	W500	W600	W700			
Part Number:		5.640.0400.090	5.640.0500.090	5.640.0600.090	5.640.0700.090			
		 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12	 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13	 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14	 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15			
Allowable antenna area in ft ² *	CSA-S37-01 350/450/550 Pa Wind 25mm ice	138/98/74	162/120/94	156/120/96	224/156/114			
Suggested List Price		\$16,876.83	\$17,886.39	\$18,835.66	\$19,797.89			
Shipping Weight (lbs)		6,124	6,724	7,300	7,845			

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory:	W400	W500	W600	W700			
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00			
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00			
Anti-Climb Shield Kits	4.936.0026.012 \$1,460.00	4.936.0026.013 \$1,520.00	4.936.0026.014 \$1,580.00	4.936.0026.015 \$1,643.00			
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00			

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W020	W040	W060	W080	W100	W200	W300
Part Number:		5.640.0020.100	5.640.0040.100	5.640.0060.100	5.640.0080.100	5.640.0100.100	5.640.0200.100	5.640.0300.100
		 Sec #1 Sec #1 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6	 Sec #1 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7	 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8	 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9	 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10	 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11	 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12
Allowable antenna area in ft ² *	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--/--	--/--/--	--/--/--	--/--/--	60/46/32	80/56/46	108/74/52
Suggested List Price		\$14,026.33	\$14,439.34	\$15,003.36	\$15,687.31	\$16,334.93	\$17,167.18	\$18,120.50
Shipping Weight (lbs)		3,795	4,035	4,315	4,694	5,190	5,784	6,440

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.




Common Accessories

Accessory:	W020	W040	W060	W080	W100	W200	W300
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	4.936.0026.006 \$1,113.00	4.936.0026.007 \$1,173.00	4.936.0026.008 \$1,233.00	4.936.0026.009 \$1,287.00	4.936.0026.010 \$1,347.00	4.936.0026.011 \$1,397.00	4.936.0026.012 \$1,460.00
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.175 \$1,320.00	4.912.1177.175 \$1,320.00	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00	4.912.1177.225 \$1,330.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

100' Towers continued










Model Designation:		W400	W500	W600				
Part Number:		5.640.0400.100	5.640.0500.100	5.640.0600.100				
		 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13	 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14	 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15				
Allowable antenna area in ft ² *	CSA-S37-01 350/450/550 Pa Wind 25mm ice	134/96/70	158/118/92	154/116/94				
Suggested List Price		\$19,193.97	\$20,268.53	\$21,259.47				
Shipping Weight (lbs)		7,106	7,758	8,317				

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "-" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory:	W400	W500	W600				
Cable Safety Climb Kits <i>no slider</i>	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00	4.99.0300.000 \$486.00				
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00				
Anti-Climb Shield Kits	4.936.0026.013 \$1,520.00	4.936.0026.014 \$1,580.00	4.936.0026.015 \$1,643.00				
Tower Grounding Kit <i>basic, single leg</i>	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00	4.912.1177.250 \$1,525.00				

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W040	W060	W080	W100	W200	W300	W400
Part Number:		5.640.0040.110	5.640.0060.110	5.640.0080.110	5.640.0100.110	5.640.0200.110	5.640.0300.110	5.640.0400.110
								
		Sec #1	Sec #1	Sec #1	Sec #1	Sec #2	Sec #3	Sec #4
		Sec #1	Sec #1	Sec #1	Sec #2	Sec #2	Sec #3	Sec #4
		Sec #1	Sec #1	Sec #2	Sec #3	Sec #3	Sec #4	Sec #5
		Sec #1	Sec #2	Sec #3	Sec #4	Sec #5	Sec #6	Sec #7
		Sec #2	Sec #3	Sec #4	Sec #5	Sec #6	Sec #7	Sec #8
		Sec #3	Sec #4	Sec #5	Sec #6	Sec #7	Sec #8	Sec #9
		Sec #4	Sec #5	Sec #6	Sec #7	Sec #8	Sec #9	Sec #10
		Sec #5	Sec #6	Sec #7	Sec #8	Sec #9	Sec #10	Sec #11
		Sec #6	Sec #7	Sec #8	Sec #9	Sec #10	Sec #11	Sec #12
		Sec #7	Sec #8	Sec #9	Sec #10	Sec #11	Sec #12	Sec #13
		Sec #8	Sec #9	Sec #10	Sec #11	Sec #12	Sec #13	Sec #14
Allowable antenna area in ft²*	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	--/--	58/44/30	78/54/44	104/72/52	130/92/68
Suggested List Price		\$16,122.86	\$16,806.81	\$17,454.43	\$18,286.68	\$19,258.30	\$20,437.64	\$21,576.11
Shipping Weight (lbs)		5,085	5,409	6,003	6,651	7,422	8,140	8,140

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 **Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.


Common Accessories

Accessory:	W040	W060	W080	W100	W200	W300	W400
Cable Safety Climb Kits <i>no slider</i>	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00
Anti-Climb Shield Kits	4.936.0026.008 \$1,233.00	4.936.0026.009 \$1,287.00	4.936.0026.010 \$1,347.00	4.936.0026.011 \$1,397.00	4.936.0026.012 \$1,460.00	4.936.0026.013 \$1,520.00	4.936.0026.014 \$1,580.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

110' Towers continued



Model Designation:		W500					
Part Number:		5.640.0500.110					
		 <div> Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15 </div>					
Allowable antenna area in ft ² *	CSA-S37-01 350/450/550 Pa Wind 25mm ice	154/114/90					
Suggested List Price		\$22,692.34					
Shipping Weight (lbs)		8,775					

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
*Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory:	W500						
Cable Safety Climb Kits <small>no slider</small>	4.99.0305.000 \$594.00						
Lighting Kit	4.942.1024.150 \$2,440.00						
Anti-Climb Shield Kits	4.92.0001.213 \$1,544.00						

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W020	W040	W060	W080	W100	W200	W300
Part Number:		5.640.0020.120	5.640.0040.120	5.640.0060.120	5.640.0080.120	5.640.0100.120	5.640.0200.120	5.640.0300.120
		<div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #2</div><div></div><div>Sec #3</div><div></div><div>Sec #4</div><div></div><div>Sec #5</div><div></div><div>Sec #6</div><div></div><div>Sec #7</div><div></div><div>Sec #8</div></div>	<div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #2</div><div></div><div>Sec #3</div><div></div><div>Sec #4</div><div></div><div>Sec #5</div><div></div><div>Sec #6</div><div></div><div>Sec #7</div><div></div><div>Sec #8</div><div></div><div>Sec #9</div></div>	<div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #2</div><div></div><div>Sec #3</div><div></div><div>Sec #4</div><div></div><div>Sec #5</div><div></div><div>Sec #6</div><div></div><div>Sec #7</div><div></div><div>Sec #8</div><div></div><div>Sec #9</div><div></div><div>Sec #10</div></div>	<div><div></div><div>Sec #1</div><div></div><div>Sec #1</div><div></div><div>Sec #2</div><div></div><div>Sec #3</div><div></div><div>Sec #4</div><div></div><div>Sec #5</div><div></div><div>Sec #6</div><div></div><div>Sec #7</div><div></div><div>Sec #8</div><div></div><div>Sec #9</div><div></div><div>Sec #10</div><div></div><div>Sec #11</div></div>	<div><div></div><div>Sec #1</div><div></div><div>Sec #2</div><div></div><div>Sec #3</div><div></div><div>Sec #4</div><div></div><div>Sec #5</div><div></div><div>Sec #6</div><div></div><div>Sec #7</div><div></div><div>Sec #8</div><div></div><div>Sec #9</div><div></div><div>Sec #10</div><div></div><div>Sec #11</div><div></div><div>Sec #12</div></div>	<div><div></div><div>Sec #2</div><div></div><div>Sec #3</div><div></div><div>Sec #4</div><div></div><div>Sec #5</div><div></div><div>Sec #6</div><div></div><div>Sec #7</div><div></div><div>Sec #8</div><div></div><div>Sec #9</div><div></div><div>Sec #10</div><div></div><div>Sec #11</div><div></div><div>Sec #12</div><div></div><div>Sec #13</div></div>	<div><div></div><div>Sec #3</div><div></div><div>Sec #4</div><div></div><div>Sec #5</div><div></div><div>Sec #6</div><div></div><div>Sec #7</div><div></div><div>Sec #8</div><div></div><div>Sec #9</div><div></div><div>Sec #10</div><div></div><div>Sec #11</div><div></div><div>Sec #12</div><div></div><div>Sec #13</div><div></div><div>Sec #14</div></div>
Allowable antenna area in ft²*	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--/--	--/--/--	--/--/--	--/--/--	56/42/30	76/52/42	102/70/52
Suggested List Price		\$17,242.36	\$17,926.31	\$18,573.93	\$19,406.18	\$20,377.80	\$21,575.44	\$22,819.78
Shipping Weight (lbs)		4,732	5,420	5,795	6,223	6,871	7,633	8,457

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 **Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.


Common Accessories

Accessory	S100	H100	H110	S300	S310	S400	S410
Cable Safety Climb Kits <i>no slider</i>	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

120' Towers continued



Model Designation:		W400					
Part Number:		5.640.0400.120					
		 <div> Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15 </div>					
Allowable antenna area in ft ² *	CSA-S37-01 350/450/550 Pa Wind 25mm ice	128/90/66					
Suggested List Price		\$23,999.92					
Shipping Weight (lbs)		9,157					

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory	S500						
Cable Safety Climb Kits <i>no slider</i>	4.99.0305.000 \$594.00						
Lighting Kit	4.942.1024.150 \$2,440.00						

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Model Designation:		W020	W040	W060	W080	W100	W200	W300	
Part Number:		5.640.0020.130	5.640.0040.130	5.640.0060.130	5.640.0080.130	5.640.0100.130	5.640.0200.130	5.640.0300.130	
<div></div>		<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #2</div></div>	<div><div></div><div>Sec #3</div></div>
		<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #2</div></div>	<div><div></div><div>Sec #3</div></div>	<div><div></div><div>Sec #4</div></div>	
		<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #2</div></div>	<div><div></div><div>Sec #3</div></div>	<div><div></div><div>Sec #4</div></div>	<div><div></div><div>Sec #5</div></div>	
		<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #2</div></div>	<div><div></div><div>Sec #3</div></div>	<div><div></div><div>Sec #4</div></div>	<div><div></div><div>Sec #5</div></div>	<div><div></div><div>Sec #6</div></div>	
		<div><div></div><div>Sec #1</div></div>	<div><div></div><div>Sec #2</div></div>	<div><div></div><div>Sec #3</div></div>	<div><div></div><div>Sec #4</div></div>	<div><div></div><div>Sec #5</div></div>	<div><div></div><div>Sec #6</div></div>	<div><div></div><div>Sec #7</div></div>	
		<div><div></div><div>Sec #2</div></div>	<div><div></div><div>Sec #3</div></div>	<div><div></div><div>Sec #4</div></div>	<div><div></div><div>Sec #5</div></div>	<div><div></div><div>Sec #6</div></div>	<div><div></div><div>Sec #7</div></div>	<div><div></div><div>Sec #8</div></div>	
		<div><div></div><div>Sec #3</div></div>	<div><div></div><div>Sec #4</div></div>	<div><div></div><div>Sec #5</div></div>	<div><div></div><div>Sec #6</div></div>	<div><div></div><div>Sec #7</div></div>	<div><div></div><div>Sec #8</div></div>	<div><div></div><div>Sec #9</div></div>	
		<div><div></div><div>Sec #4</div></div>	<div><div></div><div>Sec #5</div></div>	<div><div></div><div>Sec #6</div></div>	<div><div></div><div>Sec #7</div></div>	<div><div></div><div>Sec #8</div></div>	<div><div></div><div>Sec #9</div></div>	<div><div></div><div>Sec #10</div></div>	
		<div><div></div><div>Sec #5</div></div>	<div><div></div><div>Sec #6</div></div>	<div><div></div><div>Sec #7</div></div>	<div><div></div><div>Sec #8</div></div>	<div><div></div><div>Sec #9</div></div>	<div><div></div><div>Sec #10</div></div>	<div><div></div><div>Sec #11</div></div>	
		<div><div></div><div>Sec #6</div></div>	<div><div></div><div>Sec #7</div></div>	<div><div></div><div>Sec #8</div></div>	<div><div></div><div>Sec #9</div></div>	<div><div></div><div>Sec #10</div></div>	<div><div></div><div>Sec #11</div></div>	<div><div></div><div>Sec #12</div></div>	
		<div><div></div><div>Sec #7</div></div>	<div><div></div><div>Sec #8</div></div>	<div><div></div><div>Sec #9</div></div>	<div><div></div><div>Sec #10</div></div>	<div><div></div><div>Sec #11</div></div>	<div><div></div><div>Sec #12</div></div>	<div><div></div><div>Sec #13</div></div>	
		<div><div></div><div>Sec #8</div></div>	<div><div></div><div>Sec #9</div></div>	<div><div></div><div>Sec #10</div></div>	<div><div></div><div>Sec #11</div></div>	<div><div></div><div>Sec #12</div></div>	<div><div></div><div>Sec #13</div></div>	<div><div></div><div>Sec #14</div></div>	
		<div><div></div><div>Sec #9</div></div>	<div><div></div><div>Sec #10</div></div>	<div><div></div><div>Sec #11</div></div>	<div><div></div><div>Sec #12</div></div>	<div><div></div><div>Sec #13</div></div>	<div><div></div><div>Sec #14</div></div>	<div><div></div><div>Sec #15</div></div>	
Allowable antenna area in ft²*	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	--/--	--/--	54/42/30	74/52/40	100/68/50	
Suggested List Price		\$19,045.81	\$19,693.43	\$20,525.68	\$21,497.30	\$22,694.94	\$23,957.58	\$25,243.59	
Shipping Weight (lbs)		5390	5886	6,650	7,090	7,853	8,668	9,474	

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 **Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.







Common Accessories

Accessory	S300	S310	S400	S410	S500	S510	S600
Cable Safety Climb Kits <i>no slider</i>	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

140' Towers



Model Designation:	W020	W040	W060	W080	W100	W200	
Part Number:	5.640.0020.140	5.640.0040.140	5.640.0060.140	5.640.0080.140	5.640.0100.140	5.640.0200.140	
	 Sec #1 Sec #1 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10	 Sec #1 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11	 Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12	 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13	 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14	 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15	
Allowable antenna area in ft ² *	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	--/--	--/--	54/40/30	74/52/40
Suggested List Price	\$20,812.93	\$21,645.18	\$22,616.80	\$23,814.44	\$25,077.08	\$26,381.39	
Shipping Weight (lbs)	6106	6700	7,595	8,072	8,887	9,685	






*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory	S300	S310	S400	S410	S500	S510	
Cable Safety Climb Kits <i>no slider</i>	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	4.99.0305.000 \$594.00	
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.



Model Designation:		W060	W080	W100			
Part Number:		5.640.0060.150	5.640.0080.150	5.640.0100.150			
					 <p>Cable Safety Climb Kit – pg 67 (slider not included)</p>  <p>Step-Bolt Kit – pg 59</p>		
		Sec #1 Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13	Sec #1 Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14	Sec #1 Sec #2 Sec #3 Sec #4 Sec #5 Sec #6 Sec #7 Sec #8 Sec #9 Sec #10 Sec #11 Sec #12 Sec #13 Sec #14 Sec #15			
Allowable antenna area in ft ² *	CSA-S37-01 350/450/550 Pa Wind 25mm ice	--/--	--/--	52/40/30			
Suggested List Price		\$24,933.94	\$26,196.58	\$27,500.89			
Shipping Weight (lbs)		8,580	9,106	9,904			

*Assumptions: Projected areas (PA) shown are bare; a 1.5 multiplier used for iced area; loads centrally located and balanced at tower top; considers step-pegs, safety cable, and one 1/2" tx line per 10 sq.ft.; "--" indicates tower failure.
 *Round antennas include omnis, dipoles, dishes with radomes, etc. Antennas where wind hits a round surface. Flat Antennas include flat panels, dishes without radomes and cameras, where wind hits a flat surface.

Common Accessories

Accessory	W060	W080	W100				
Lighting Kit	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00	4.942.1024.150 \$2,440.00				

For more SuperTitan Accessories and Replacement Parts, see pages 61 to 76.

Section Pricing



SuperTitan Weld Sections				
Part #	Description	Weight	List Price	Image
4.640.0001.000	SuperTitan Weld Section #1: Non-Tapered	220	\$1,119.50	
4.640.0002.000	SuperTitan Weld Section #2: Tapered	212	\$1,137.80	
4.640.0003.000	SuperTitan Weld Section #3: Tapered	317	\$1,243.67	
4.640.0004.000	SuperTitan Weld Section #4: Tapered	383	\$1,307.58	
4.640.0005.000	SuperTitan Weld Section #5: Tapered	459	\$1,432.87	
4.640.0006.000	SuperTitan Weld Section #6: Tapered	472	\$1,461.58	
4.640.0007.000	SuperTitan Weld Section #7: Tapered	509	\$1,525.37	
4.640.0008.000	SuperTitan Weld Section #8: Tapered	597	\$1,676.38	
4.640.0009.000	SuperTitan Weld Section #9: Tapered	640	\$1,709.02	
4.640.0010.000	SuperTitan Weld Section #10: Tapered	714	\$1,759.98	
4.640.0011.000	SuperTitan Weld Section #11: Tapered	812	\$1,943.42	
4.640.0012.000	SuperTitan Weld Section #12: Tapered	866	\$2,083.98	
4.640.0013.000	SuperTitan Weld Section #13: Tapered	981	\$2,310.00	
4.640.0014.000	SuperTitan Weld Section #14: Tapered	1033	\$2,375.00	
4.640.0015.000	SuperTitan Weld Section #15: Tapered	1054	\$2,416.67	

SuperTitan Weld Sections			
Part #	Description	Weight	List Price
4.640.0000.002	Template & Tie Rods fits Section #1	450	\$1,528.75
4.640.0000.003	Template & Tie Rods fits Section #2	452	\$1,535.90
4.640.0000.004	Template & Tie Rods fits Section #3	557	\$1,685.00
4.640.0000.005	Template & Tie Rods fits Section #4	558	\$1,692.48
4.640.0000.006	Template & Tie Rods fits Section #5	560	\$1,699.62
4.640.0000.007	Template & Tie Rods fits Section #6	667	\$1,845.33
4.640.0000.008	Template & Tie Rods fits Section #7	669	\$1,852.47
4.640.0000.009	Template & Tie Rods fits Section #8	671	\$1,859.61
4.640.0000.010	Template & Tie Rods fits Section #9	689	\$1,954.04
4.640.0000.011	Template & Tie Rods fits Section #10	690	\$1,961.18
4.640.0000.012	Template & Tie Rods fits Section #11	692	\$1,969.51
4.640.0000.013	Template & Tie Rods fits Section #12	694	\$1,976.65
4.640.0000.014	Template & Tie Rods fits Section #13	696	\$1,983.79
4.640.0000.015	Template & Tie Rods fits Section #14	698	\$1,990.93
4.640.0000.016	Template & Tie Rods fits Section #15	700	\$1,998.00

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.